


PRODUCTS & Solutions

July 2020

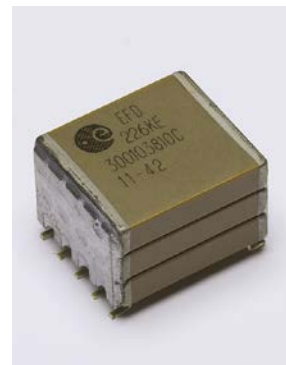

EXXELIA 

INDUSTRY SPECIALIST

EXXELIA is a manufacturer of High-Rel passive components and precision subsystems focusing on demanding end-markets and applications, intended to critical functions.

EXXELIA is valued for its ability to meet complex specifications and develop catalog and custom products complying with the most demanding qualification standards (MIL, ESA...).



COMPLETE HIGH-REL COMPONENTS PORTFOLIO


CAPACITORS



MAGNETICS



RESISTORS & SUBSYSTEMS

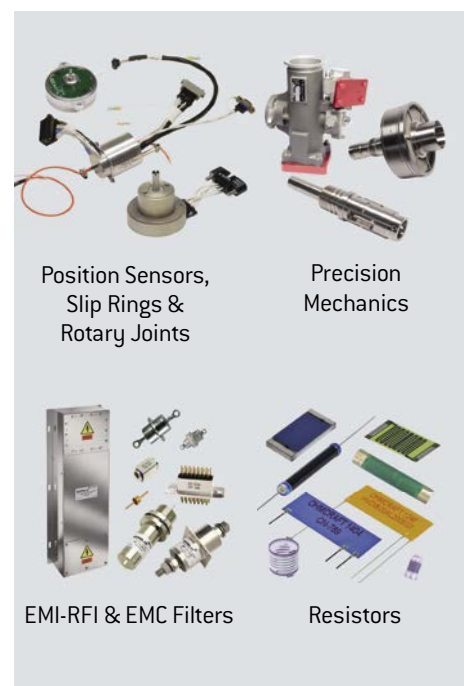

DEMANDING MARKETS



Civil aviation



Space



Defense



Transport & Energy



Telecom



Medical



Industry



Test & Measurement



EXXELIA AT A GLANCE

1900



Employees

ISO 9001
EN 9100
AS 9100
Certified



14
Manufacturing
Locations



In more than
30 countries

1
Stop Shop



EXXELIA WORLDWIDE

EXXELIA is a global company with manufacturing sites strategically located to cover all continents. Two assembly plants are established in competitive manufacturing countries, enabling the group to provide cost-effective solutions.

Thanks to an extensive sales network covering more than 30 countries, EXXELIA is able to provide prompt in-depth technical expertise throughout a project and remain close to its clients at all stages from design to production.


OUR APPROACH

EXXELIA focuses its know-how on challenging markets that require high level of technicity and reliability. Our approach is based on three key principles:

FOCUS: Serving a limited number of defined markets to better serve our customers.

INNOVATION: Provide new and creative value propositions to positively impact our customers' growth.

RESPONSIVENESS: Worldwide presence of our sales, design and production departments for optimized response time.

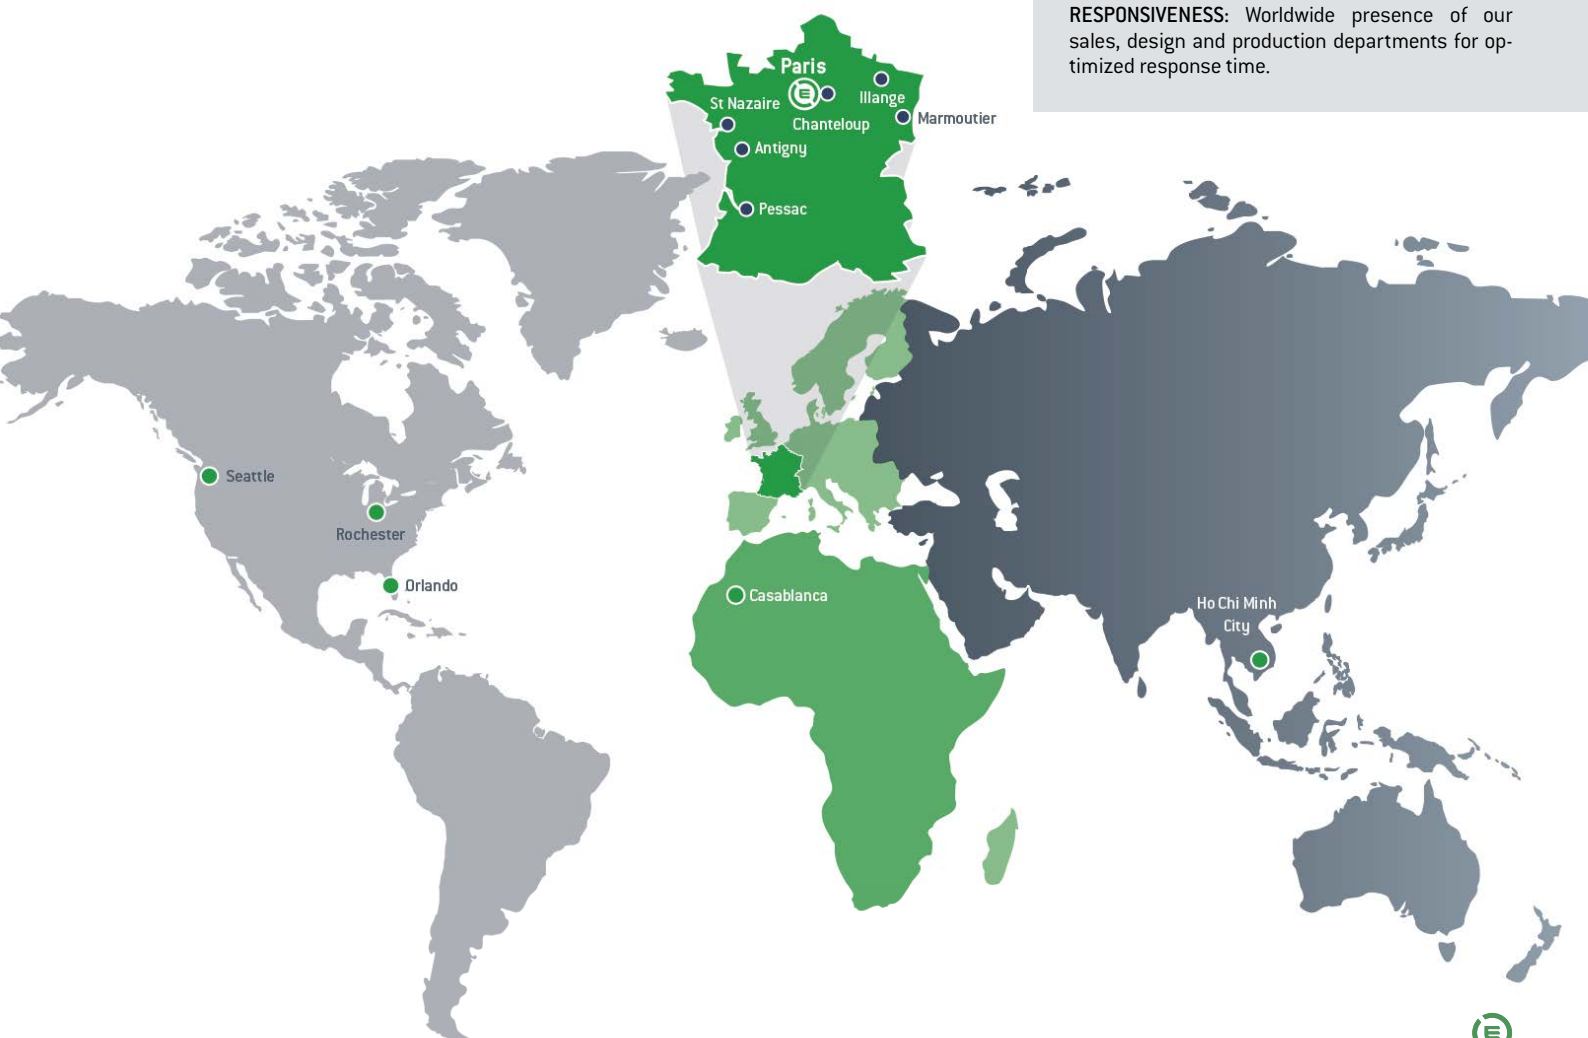


CERAMIC CAPACITORS

EXXELIA multi-layer ceramic capacitors offer excellent temperature resistance, high volume/capacitance ratio, and high reliability. With over 50 years experience, EXXELIA has acquired a comprehensive knowledge of the materials properties and performances enabling the company offer porcelain, NPO, BX, 2C1, X7R, C4xx and -2200 ppm/°C dielectrics.

Their excellent properties make EXXELIA MLCCs ideal for a wide range of applications including aircraft flight controls, switch-mode power supply in harsh environments, charge/discharge applications, medical implants, drilling tools for oil exploration and satellite platforms.

EXXELIA offers one of the most extensive ESA QPL portfolio and is embedded into numerous space programs (exploration, satellites, constellations, launchers). For requirements that cannot be met by catalog products, EXXELIA offers state-of-the-art custom designs in terms of compactness, packaging and performance.

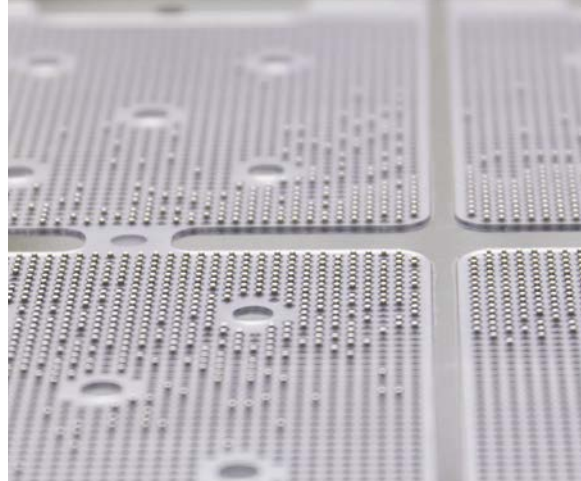

T°	Product range (space grade available in green)	Size	Dielectric material	Capa.	Voltage	For space grade		Tolerance	Use
						Capa.	Voltage		
Standard -55°C+125°C	CEC / CNC Series 	0402 ⇄ 3040	NPO BX 2C1 X7R	1 pF ⇄ 12 µF	10 V ⇄ 1 000 V	1 pF ⇄ 3.9 µF	10 V ⇄ 1 000 V	±0,25 ⇄ ±1 pF ±1% ⇄ ±20%	Precision, stability, decoupling.
	NON MAGNETIC Series 	0505 ⇄ 2220	NPO X7R	10 pF ⇄ 1 µF	50 V ⇄ 500 V	—	—	±1% ⇄ ±20%	
	OP Series 	0805 ⇄ 2220	NPO X7R	1 pF ⇄ 4.7 µF	10 V ⇄ 100 V	—	—	±0,25 ⇄ ±1 pF ±1% ⇄ ±20%	Precision, stability, decoupling. Significantly reduce risk of short circuit.
	CER / CNR Series 	0306 ⇄ 0612	NPO X7R	1 pF ⇄ 270 nF	16 V ⇄ 100 V	—	—	±1% ⇄ ±20%	Decoupling, low ESL, medical embedded.
	C3N - C4N - C3E - C4E Series 	—	NPO X7R	4.7 pF ⇄ 33 nF	25 V ⇄ 200 V	—	—	±0,25 ⇄ ±1 pF ±1% ⇄ ±20%	Medical embedded, miniaturization.
	30 S4 Series 	—	NPO X7R	470 pF ⇄ 820 nF	40 V ⇄ 100 V	—	—	±1% ⇄ ±20%	Railway.
	TCE / TCX / TCN / TXR Molded Series 	—	NPO BX 2C1 X7R	1 pF ⇄ 4.7 µF	25 V ⇄ 500 V	—	—	±0,25 ⇄ ±1 pF ±1% ⇄ ±20%	Precision, stability, decoupling.
	LA Series 	—	NPO Temp. coeff.	1 pF ⇄ 680 nF	25 V ⇄ 63 V	—	—	±0,25 ⇄ ±1 pF ±1% ⇄ ±20%	Decoupling.
	TCE / TCX / TCN / TXR Axial Series 	—	NPO BX 2C1 X7R	1 pF ⇄ 3.9 µF	25 V ⇄ 500 V	—	—	±0,25 ⇄ ±1 pF ±1% ⇄ ±20%	Precision, stability, decoupling.
	TCE / TCX / TCN / TXR Conformal Coated Series 	—	NPO BX 2C1 X7R	1 pF ⇄ 6.8 µF	25 V ⇄ 500 V	—	—	±0,25 ⇄ ±1 pF ±1% ⇄ ±20%	Precision, stability, decoupling.
	NON MAGNETIC Conformal Coated Series 	—	NPO X7R	180 pF ⇄ 1 µF	63 V ⇄ 500 V	—	—	±1% ⇄ ±20%	Precision, stability, decoupling.
	CK Series 	—	BX	10 pF ⇄ 1.5 µF	25 V ⇄ 250 V	—	—	±10% ⇄ ±20%	Decoupling.

	T°	Product range (space grade available in green)	Size	Dielectric material	Capa.	Voltage	For space grade		Tolerance	Use
							Capa.	Voltage		
High voltage	-55°C +125°C	C series 	1515 ⇕ 16080	NPO C4xx X7R	10 pF ⇕ 39 µF	200 V ⇕ 10 000 V	10 pF ⇕ 6.8 µF	250 V ⇕ 10 000 V	±1% ⇕ ±20%	Power supply, voltage multiplier, radars. • aeronautic • space • defense • railways
		TCK Series 	—	NPO C4xx X7R	10 pF ⇕ 39 µF	200 V ⇕ 10 000 V	10 pF ⇕ 6.8 µF	250 V ⇕ 10 000 V	±1% ⇕ ±20%	
		VM Series 	—	—	—	—	—	—	—	
		TCL Series 	—	NPO C4xx X7R	10 pF ⇕ 39 µF	200 V ⇕ 10 000 V	—	—	±1% ⇕ ±20%	
		TCF Series 	—	NPO C4xx X7R	10 pF ⇕ 39 µF	200 V ⇕ 10 000 V	10 pF ⇕ 6.8 µF	250 V ⇕ 5 000 V	±1% ⇕ ±20%	
		TKD Series 	—	NPO C4xx X7R	10 pF ⇕ 39 µF	200 V ⇕ 10 000 V	10 pF ⇕ 2.7 µF	250 V ⇕ 5 000 V	±1% ⇕ ±20%	
		CS Series 	2020 ⇕ 16080	NPO C4xx X7R	220 pF ⇕ 15 µF	1 000 V ⇕ 10 000 V	—	—	±1% ⇕ ±20%	
High capacitance	-55°C +125°C	R Series (chips) 	2225 ⇕ 45107	X7R	47 nF ⇕ 27 µF	50 V ⇕ 500 V	—	—	±10% ⇕ ±20%	Switch Mode Power Supply, filtering, smoothing, decoupling. • aeronautic • space • defense
		R Series (leaded) 	—	X7R	47 nF ⇕ 27 µF	50 V ⇕ 500 V	—	—	±10% ⇕ ±20%	
		TEF series 	—	NPO	10 nF ⇕ 680 nF	63 V ⇕ 500 V	—	—	±1% ⇕ ±20%	
		SV / SC Series 	2225 ⇕ 125205	X7R	47 nF ⇕ 390 µF	50 V ⇕ 500 V	—	—	±10% ⇕ ±20%	
		CNC3X Series 	2220 ⇕ 4040	X7R	1.2 µF ⇕ 68 µF	16 V ⇕ 25 V	1.2 µF ⇕ 68 µF	16 V ⇕ 25 V	±10% ⇕ ±20%	
		CNC5X Series 	—	—	—	—	100 nF ⇕ 180 µF	50 V ⇕ 500 V	—	
		CEC5X Series 	3033 ⇕ 80150	NPO	10 nF ⇕ 6.8 µF	63 V ⇕ 500 V	—	—	±1% ⇕ ±20%	
		TEP / TEV series 	—	NPO	10 nF ⇕ 6.8 nF	63 V ⇕ 500 V	—	—	±1% ⇕ ±20%	
High temperature	-55°C +250°C	TCN8X Series 	—	X7R	0.47 µF ⇕ 120 µF	63 V ⇕ 500 V	—	—	±10% ⇕ ±20%	Oil drilling, motor control, braking systems.
		CE / CN Series 	0402 ⇕ 3040	NPO X7R	1 pF ⇕ 8.2 µF	16 V ⇕ 100 V	—	—	±0,25 ⇕ ±1pF ±1% ⇕ ±20%	
		SCT Series 	2225 ⇕ 25205	X7R	47 nF ⇕ 390 µF	50 V ⇕ 500 V	—	—	±10% ±20%	
		TCE/TCN Molded Series HT 	—	NPO X7R	1 pF ⇕ 10 µF	16 V ⇕ 100 V	—	—	±0,25 ⇕ ±1pF ±1% ⇕ ±20%	
		TCE / TCN Self protected Series 	—	NPO X7R	10 pF ⇕ 3.9 µF	25 V ⇕ 500 V	—	—	±0,25 ⇕ ±1pF ±1% ⇕ ±20%	
Feed-thru	-55°C +125°C	TCH Series 	—	NPO X7R	10 pF ⇕ 15 µF	200 V ⇕ 10 000 V	—	—	±1% ⇕ ±20%	Very low ESL
		TBC series 	—	NPO X7R	10 pF ⇕ 5600 pF	25 V ⇕ 1 000 V	—	—	±1% ⇕ ±20%	
		BPM Series 	—	X7R	330 pF ⇕ 68 nF	25 V ⇕ 200 V	—	—	±10% ⇕ ±20%	










RF CAPACITORS

High-Q CAPACITORS:

EXXELIA High-Q MLCC capacitors are designed to handle high power and high voltage ratings (from 1000 V to 7000 V) for applications in RF power amplifiers, base stations, filters, broadcasting, medical MRIs and industrial electronics. All series are RoHS with non-magnetic terminations available.

BROADBAND CAPACITORS:

EXXELIA Broadband capacitors allow a flat insertion loss up to 35 GHz, ideal for high-end optical network infrastructure.

	T°	Product range (space grade available in green)	Size	Dielectric material	Capacitance	Voltage	For space grade		Tolerance	Use
							Capacitance	Voltage		
High Q	Classic	CH Series		0505 ⇕ 1111	P100	0.1 pF ⇕ 1 nF	50 V ⇕ 1 500 V	0.1 nF ⇕ 1 nF	50 V ⇕ 1 500 V	Cellular base station amplifier, MRI.
	Super	SH series		0402 ⇕ 1210	NPO	0.2 pF ⇕ 1 nF	25 V ⇕ 1 500 V	—	—	Cellular base station equipment Broadband Point to point/ multi-point radios RF generators
	reverse geometry	SHD / SHR-Series		0709 ⇕ 0711	NPO	0.5 pF ⇕ 100 pF	500 V	—	—	
	HSRF	NHB Series		1111	NPO	0.3 pF ⇕ 100 pF	500 V	—	—	
	High Power	CP Series		2225 ⇕ 4040	P100	1 pF ⇕ 10 nF	200 V ⇕ 7 000 V	—	—	RF power amplifier Plasma chamber MRI coils
		CL Series		2225 ⇕ 7065	NPO	1 pF ⇕ 10 nF	200 V ⇕ 7 000 V	—	—	
Broadband	eXtra	XBL Series NEW		EIA 0402	X7R	100 nF	16 V	—	—	Optoelectronics / High-speed data Broadband test equipment & applications Broadband microwave/ millimeter wave amplifiers & oscillators
	Ultra	UBL Series NEW		EIA 0402	X7R	100 nF	16 V	—	—	
		UBZ Series NEW		EIA 0201	X5R X6T	100 nF	10 V	—	—	

MICROWAVE COMPONENTS

TRIMMER CAPACITORS

EXXELIA is one of the few suppliers in the world able to offer a wide range of RoHS trimmer capacitors using ceramic, air or sapphire as dielectrics. A broad range of capacitances, voltages and temperature coefficients are available.




TUNING ELEMENTS

Frequency Tuning Elements with self locking mechanism are high precision crews for cavity filter tuning. INVAR versions are available (space applications).



FERRITE MATERIALS

Mostly intended for isolators and circulators sub-systems used in radiocommunication systems, ferrite materials from EXXELIA are offered in disks, triangles and special custom designed dimensions. They are all based on EXXELIA own fomulation providing low ΔH propitious to IMD reduction.

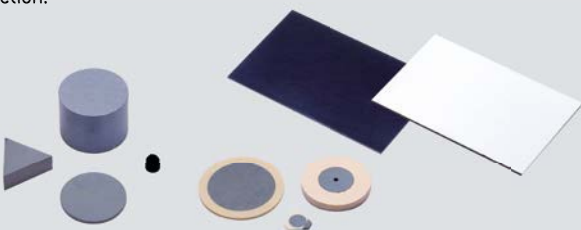

DIELECTRIC & COAXIAL RESONATORS

EXXELIA offers a wide range of dielectric resonators with high "Q" factor and dielectric constant from 24 to 78. The coaxial resonators products can be used between 300 MHz and 6 GHz and are available in dimensions from 2 x 2 to 12 x 12 mm, allowing the best compromise between impedance, "Q" factor and resonant frequency.



TANTALUM CAPACITORS

CAPACITORS

Tantalum capacitors offer the highest charge per unit of volume combined with extremely high reliability and durability. EXXELIA manufactures an extensive range of solid (MnO₂ and polymer technologies) and wet tantalum capacitors for demanding applications such as satellites, aircraft

and defense electronics through MIL and DSCC-qualified series.

Specific interfaces, package size and characteristics are available upon request.

	Product range		Detail specification	Capacitance	Voltage	Operating Temperature	Main features
Wet tantalum capacitors	CT79 / CT79 SMD CT79E / CT79E SMD		CECC 30202-005/001/801 ESCC 3003/005	1.7 µF ⇒ 2 200 µF	6 V ⇒ 150 V	–55°C+125°C	Reverse voltage - High ripple current
	ST79 / ST79 SMD		According to DSCC 93026 ESCC 3003/006	10 µF ⇒ 1 800 µF	25 V ⇒ 125 V	–55°C+125°C	High capacitance
	CT79 HT200 - CT79E HT200 ST79 HT200		According to CECC 30202-005/001/801	1.7 µF ⇒ 2 200 µF	6 V ⇒ 150 V	–55°C+200°C	High capacitance. High Temperature.
	WT83 / WS83		According to DSCC 10004	150 µF ⇒ 10 000 µF	10 V ⇒ 125 V	–55°C+125°C	Very high capacitance Enhanced performances
	DSCC 10004 NEW		DWG N°10004	220 µF ⇒ 10 000 µF	10 V ⇒ 125 V	–55°C+125°C	Very high capacitance Enhanced performances
	DSCC 93026 NEW		DWG N°93026	10 µF ⇒ 1 800 µF	6 V ⇒ 125 V	–55°C+125°C	Very high capacitance
	MIL 39006/22 NEW		MIL-PRF-39006/22 Failure rate Level M, P	1.7 µF ⇒ 1 200 µF	6 V ⇒ 125 V	–55°C+125°C	MIL OPL High Vibration option (H) - High ripple current
	MIL 39006/25 NEW		MIL-PRF-39006/25 Failure rate Level M	6.8 µF ⇒ 680 µF	25 V ⇒ 125 V	–55°C+125°C	MIL OPL High Vibration option (H) - High ripple current Extended range
	CT9 / CT9E		According to CECC 30202-004	3 µF ⇒ 2 200 µF	6.3 V ⇒ 150 V	–55°C+125°C	Silver case. Glass metal seal. Hermetical Extended range (CT9E)
	CT4 / CT4E		CECC 30202-003 (CT4) According to BS 9073 F008/F032 (CT 4E)	1.7 µF ⇒ 2 200 µF	6 V ⇒ 150 V	–55°C+125°C	Silver case. Seal and resin sealing Extended range (CT4E)
	SPE0844 / SPE0844S		–	27 µF ⇒ 6 000 µF	6 V ⇒ 375 V	–55°C+125°C	Parallel and serial assemblies of capacitors Reverse voltage - High ripple current
	AP31 / AP41 / AS31		–	27 µF ⇒ 40 000 µF	10 V ⇒ 450 V	–55°C+125°C	Parallel and serial assemblies of capacitors Very High Capa/Voltage. High reliability design
Polymer caps.	CTP21		–	47 µF ⇒ 560 µF	16 V ⇒ 75 V	–55°C+105°C	Very low ESR. High ripple current High surge current
	CTP42		–	68 µF ⇒ 1 200 µF	16 V ⇒ 75 V	–55°C+105°C	Assembly of 2 CTP21 in parallel Ultra low ESR. Extended Capacitance
Solid tantalum capacitors	CTS1 / CTS1M		CECC 30201-001/002/801 MIL-PRF 39003/01 (CTS1M)	0.1 µF ⇒ 330 µF	6.3 V ⇒ 125 V	–55°C+125°C	Standard range. General purpose +125°C
	CTS13		CECC 30201-005	0.1 µF ⇒ 330 µF	6.3 V ⇒ 63 V	–55°C+85°C	Standard range. General purpose +85°C
	CTS32		CECC 30201-019	1 µF ⇒ 330 µF	6.3 V ⇒ 63 V	–55°C+125°C	Standard range. High surge current Reverse voltage
	CTS23		–	0.1 µF ⇒ 1 200 µF	6.3 V ⇒ 63 V	–55°C+125°C	Extended range. General purpose
	CTS33		–	0.1 µF ⇒ 1 000 µF	6.3 V ⇒ 63 V	–55°C+125°C	Extended range. Low leakage current
	CTS21 / CTS21E / CTS1M		CECC 30201-040 According to MIL-PRF 39003/09 (CTS21M)	5.6 µF ⇒ 1 000 µF	6.3 V ⇒ 63 V	–55°C+125°C	Low ESR. High ripple current High surge current
	CTS41 / CTS41RSE		CECC 30201-037	0.1 µF ⇒ 150 µF	6.3 V ⇒ 50 V	–55°C+125°C	High surge current. Reverse voltage Low ESR (CTS41 RSE)
	CTS4		CECC 30201-003	0.1 µF ⇒ 150 µF	6.3 V ⇒ 50 V	–55°C+85°C	General purpose
	CTC3 / CTC3E		–	0.1 µF ⇒ 680 µF	4 V ⇒ 50 V	–55°C+125°C	Standard chip size. General purpose Extended range (CTC3E)
	CTC4		–	0.1 µF ⇒ 100 µF	6.3 V ⇒ 50 V	–55°C+125°C	Standard chip size. General purpose High surge current
	CTC4RSE		–	4.7 µF ⇒ 1 000 µF	6.3 V ⇒ 50 V	–55°C+125°C	Low ESR. High ripple current High surge current
	CTC21 / CTC21E		CECC 30801-013 ESCC 3012/002 (CTC 21) ESCC 3012/003 (CTC 21E)	5.6 µF ⇒ 680 µF	6.3 V ⇒ 100 V	–55°C+125°C	Low ESR. High ripple current High surge current
	SMT47 NEW		–	47 µF ⇒ 1 500 µF	6.3 V ⇒ 63 V	–55°C+125°C	Extended Capacitance - Low ESR Enhanced performance
	CTC42 / CTC42E		–	12 µF ⇒ 1 500 µF	6.3 V ⇒ 80 V	–55°C+125°C	Assembly of 2 CTC21 / CTC21E in parallel.

FILM CAPACITORS

FILM CAPACITORS:


EXXELIA manufactures a versatile range of rugged, metalized film and film foil capacitors with high-temperature (up to +200°C), low-loss, long life and stability characteristics.

By using a wide range of dielectrics (PET, PPS, PP, reconstituted mica...) EXXELIA is able to cover the majority of technical needs.

Most common configurations are available (wrap & fill, axial, hermetic tubular, radial, bath tub, lugs, brackets, feed through, glass tube...) and custom designs is one of EXXELIA's recognized strengths.

MICA CAPACITORS:

Capacitors with mica dielectric are noted for their excellent temperature performance, low loss at all frequencies and high dielectric strength and stability over time. They are particularly recommended for use in filtering circuits, delay line circuits, oscillators, pulse circuits etc...

	T (°C)	Product range (space grade available in green)	Dielectric	Capacitance	Tolerance	Voltage	Qualification	Use
High Temperature	-55°C +200°C	253P NEW 	PTFE	22 nF ⇄ 1 µF	±5% ±10%	50 V	—	Oil & Gas Aerospace & Defense High Temperature Modules
	-55°C +180°C	560P NEW 	Metallized Polymer	0.1 µF ⇄ 10 µF	±5% ±10%	320 V	—	Aerospace & Defense High Temperature Modules Industrial
Polyester for S.M.P.S.	-55°C +125°C (+155°C)	PM 90 [S] PM 94 [S] 	Metalized polyester (P.E.T.)	8.2 nF ⇄ 150 µF	±5% ⇄ ±20%	50 V ⇄ 630 V	ESA/ESCC (EPPL, QPL)	High frequency switch mode power supplies, SMD. • defense • aeronautic • space
		PM 96 [S] PM 96 T [S] MKT [S] 		33 nF ⇄ 100 µF	±5% ⇄ ±20%	25 V ⇄ 630 V	Acc. ESA	
		PM 948 [S] PM 907 [S] 		22 nF ⇄ 180 µF	±10% ±20%	63 V ⇄ 1250 V	ESA / ESCC	
		PHM 912 PHM 912 S NEW [on going] 	Metalized plastic film	1.8 µF ⇄ 68 µF	±10% ±20%	250 V ⇄ 1000 V	in house	
Polyester	-55°C +125°C	PM 50 - PM 60 	Metalized polyester	1 nF ⇄ 22 µF	±5% ⇄ ±20%	40 V ⇄ 630 V	CECC / IEC	Standard applications.
		PM 7 - PM 12 PM 720 - PM 730 		82 pF ⇄ 10 µF	±5% ⇄ ±20%	63 V ⇄ 630 V	CECC / IEC	
		MPA HT MRA HT 		1 nF ⇄ 4.7 µF	±5% ⇄ ±20%	1000 V ⇄ 15000 V	in house	
		BIK-X2/Y BIK P-X/Y BIK CR 	Metalized polyester. Metalized polypropylene	1 nF ⇄ 6.8 µF	±5% ⇄ ±20%	400 V _{DC} 250 V _{AC}	in house	High Voltage
		218P 	Polyester (P.E.T.)	1 nF ⇄ 12.0 µF	±20% ⇄ ±5%	100 ⇄ 400 V	MIL QPL	
		410P 		1 nF ⇄ 5.0 µF	+20% -10% ⇄ ±10%	50 ⇄ 600 V	—	
		430P 		1 nF ⇄ 10.0 µF	±20% ⇄ ±5%	63 ⇄ 16 000 V	—	
		431P 		10 nF ⇄ 15.0 µF	±20% ⇄ ±5%	63 ⇄ 630 V	—	
		442P 		10 nF ⇄ 10.0 µF	±20% ⇄ ±5%	63 ⇄ 400 V	—	
		132P 		1 nF ⇄ 1.0 µF	+20% -10% ⇄ ±10%	100 ⇄ 1 000 V	MIL QPL	AC / DC Current

	T (°C)	Product range (space grade available in green)	Dielectric	Capacitance	Tolerance	Voltage	Qualification	Use
Polycarbonate / Polyphenylene Sulfide (P.P.S. suffix T)	-55°C +125°C	A 64 S4 (T) - A 74 S4 (T) PMR 4 (T)	Metalized polycarbonate P.P.S.	1 nF ⇔ 33 µF	± 1 % ⇔ ± 20 %	40 V ⇔ 630 V	NF F 62 102	Safety capacitors for signalling and others railways applications.
		KCP 4 UA T	Film-foil P.P.S.	7.5 nF ⇔ 727 nF	± 2 % ± 5 %	630 V ⇔ 1000 V	Acc. NF F 62 102	
		K1PE T	Metalized P.P.S.	10 nF ⇔ 3.3 µF	± 1 % ⇔ ± 20 %	400 V ⇔ 630 V	NF F 62 102	
		KM 501-601(T) KM 50-60(T)	Metalized polycarbonate P.P.S.	1 nF ⇔ 22 µF	± 1 % ⇔ ± 20 %	40 V ⇔ 630 V	CECC	Precision capacitors (Capacitance stability, low tolerance) Measurement, control electronics.
		KM 111 (T)(S)		1 nF ⇔ 10 µF	± 1 % ⇔ ± 20 %	40 V ⇔ 400 V	ESA (EPPL) / CECC	
		KM 311-KM 21 (T) KM 711-KM 7 (T)		1 nF ⇔ 22 µF	± 1 % ⇔ ± 20 %	40 V ⇔ 630 V	CECC	
		KM 78 - 82 - 90 - 97 (T)		1 nF ⇔ 10 µF	± 1 % ⇔ ± 20 %	40 V ⇔ 208 V	in house	
		PMR 64 (T) PMA 64 (T)		470 pF ⇔ 22 µF	± 1 % ⇔ ± 20 %	40 V ⇔ 630 V	in house	
		PM 67 (T) PM 72 (T)		1 nF ⇔ 15 µF	± 1 % ⇔ ± 20 %	40 V ⇔ 208 V	in house	
		KM 94 (S)	Metalized P.P.S.	1 nF ⇔ 1.2 µF	± 1 % ⇔ ± 20 %	40 V ⇔ 100 V	ESA/ESCC (EPPL)	High stability, SMD.
		KM 915		1.5 nF ⇔ 2.7 µF	± 5 % ⇔ ± 20 %	250 V _{DC} ⇔ 630 V _{DC} 150 V _{AC} ⇔ 400 V _{AC}	—	AC Filtering (400 Hz)
Polyphenylene Sulfide (P.P.S.)	-55°C +125°C	810P	Polyphenylene Sulfide (P.P.S.)	1 nF ⇔ 1.0 µF	± 20 % ⇔ ± 5 %	50 ⇔ 400 V	—	Precision capacitors Low TCC
		820P		10 nF ⇔ 15.0 µF	± 10 % ⇔ ± 1 %	50 ⇔ 400 V	MIL QPL	
		832P		1 nF ⇔ 10.0 µF	± 10 % ⇔ ± 2 %	63 ⇔ 400 V	—	
		842P		10 nF ⇔ 15.0 µF	± 10 % ⇔ ± 2 %	50 ⇔ 200 V	—	
		859P		10 nF ⇔ 10.0 µF	± 20 % ⇔ ± 5 %	80 ⇔ 440 V _{RMS}	MIL QPL	
		860P		10 nF ⇔ 10.0 µF	± 20 % ⇔ ± 5 %	126 ⇔ 250 V _{RMS}	MIL QPL	
		882P		1 nF – 0.22 µF	± 10 % ⇔ ± 2 %	200 V	—	
		PRF-83421/06		1 nF ⇔ 22 µF	± 10 % ⇔ ± 0.25 %	30 ⇔ 400 V	MIL QPL	
		880P		4.7 nF ⇔ 10.0 µF	± 10 % ⇔ ± 2 %	50 ⇔ 400 V	—	
polystyrene	-55°C +85°C	PLS 3 - PLS 5 PLS 7 - PLS 8	Polystyrene + foil	10 pF ⇔ 1 µF	± 1 % ⇔ ± 5 %	63 V ⇔ 500 V	CCTU/CECC	Filtering, frequency tuning.
High voltage	-55°C +125°C	HT 72	Reconstituted mica, resin impregnated	100 pF ⇔ 4.7 µF	± 5 % ⇔ ± 20 %	630 V ⇔ 25 000 V	in house	High voltage filtering, (defense, aeronautic, space) TWT Radar, Ignition System, Firing Capacitors, Oil and Gaz.
		HT 96 HT 78(P/S) - HT 86 (P/S) HT 97(P/S)		100 pF ⇔ 2.2 µF	± 5 % ⇔ ± 20 %	630 V ⇔ 20 000 V	ESA/ESCC (QPL HT96) Acc. ESA/ESCC (HT97)	
Metalized polypropylene	(-55) - 40°C +85°C (+105)	PRA HT	Metalized polypropylene	1 nF ⇔ 10 µF	± 5 % ± 10 %	1000 V ⇔ 30 000 V	in house	High voltage
		PP 3 A - PP 3 M PR 3 A - PR 3 M	Metalized polypropylene +foil	680 pF ⇔ 1 µF	± 5 % ⇔ ± 20 %	630 V ⇔ 3 500 V 350 V _{AC} ⇔ 1 400 V _{AC}	in house	AC and pulse current
		PM 98 - PM 980	Metalized plastic film	25 µF ⇔ 1 600 µF	± 10 % ± 20 %	300 V ⇔ 1 200 V	in house	Filtering, energy storage, flash
		PP 78 A - PP 78 R PP 78 S	Metalized polypropylene	1 nF ⇔ 10.2 µF	± 1 % ⇔ ± 20 %	160 V ⇔ 630 V	UTEC/NFC	AC/DC current, standard applications
		PPS 13 PPS 16 A - PPS 16 R PP 318 - PP 418	Polypropylene + foil	100 pF ⇔ 603 nF	± 1 % ⇔ ± 20 %	63 V ⇔ 1000 V	in house	AC/DC and pulse current
		RA ... - PS ...	Metalized polypropylene +foil	100 pF ⇔ 1 µF	± 1 % ⇔ ± 20 %	630 V ⇔ 2 000 V	in house	AC and pulse current

FILM CAPACITORS

	τ	Product range	Dielectric	Capacitance	Tolerances	Voltage range	Qualification	Use
Polypropylene (P.P)	0 +40°C	682P 	Polypropylene (P.P)	5.0 μ F \Rightarrow 100 μ F	+20% -10%, \pm 10%	800 \Rightarrow 1 200 V	—	Energy storage
		684P 		5.0 μ F \Rightarrow 175 μ F	+20% -10%, \pm 10%	400 \Rightarrow 1 000 V	—	
	-55°C +70°C	730G 		0.01 μ F \Rightarrow 2.5 μ F	\pm 20% \Rightarrow \pm 5%	850 \Rightarrow 3 000 V	—	AC / & Snubber
		781P 		18.0 μ F \Rightarrow 400.0 μ F	\pm 20% \Rightarrow \pm 10%	600 \Rightarrow 1 800 V	—	
	-55°C +105°C	700P 		0.01 μ F \Rightarrow 1.0 μ F	\pm 20% \Rightarrow \pm 5%	200 \Rightarrow 800 V	—	
		709G 		1 nF \Rightarrow 4.7 μ F	\pm 20% \Rightarrow \pm 5%	160 \Rightarrow 2 000 V	—	AC / DC & Pulse current
		710P 		1 nF \Rightarrow 1.0 μ F	\pm 20% \Rightarrow \pm 5%	200 \Rightarrow 800 V	MIL QPL	
		730P / 731P 		22 nF \Rightarrow 10.0 μ F	\pm 20% \Rightarrow \pm 5%	160 \Rightarrow 630 V	—	AC / DC & Pulse current
		734G 		0.47 μ F \Rightarrow 10.0 μ F	\pm 20% \Rightarrow \pm 5%	400 \Rightarrow 600 V	—	Low inductance
		735P 		1.0 μ F \Rightarrow 30.0 μ F	\pm 20% \Rightarrow \pm 5%	100 \Rightarrow 400 V	MIL QPL	SMPS
		744G 		0.47 μ F \Rightarrow 3.5 μ F	\pm 20% \Rightarrow \pm 5%	600 V	—	
		752P 		0.10 μ F \Rightarrow 2.5 μ F	\pm 20% \Rightarrow \pm 5%	800 \Rightarrow 3 000 V	—	IGBT Snubber
Paper / Foil	-55°C +125°C	118P 	Paper / Foil	1 nF \Rightarrow 12.0 μ F	\pm 20% to \pm 5%	200 \Rightarrow 1 000 V	MIL QPL	Bypass, coupling
		103P 		1 nF \Rightarrow 1.0 μ F	\pm 20% to \pm 10%	200 \Rightarrow 600 V	MIL QPL	RFI
		911P 		0.10 μ F \Rightarrow 2.7 μ F	10%	400 V	—	
	-65°C +125°C	131P 		1 nF \Rightarrow 1.0 μ F	\pm 20% to \pm 5%	200 \Rightarrow 1 000 V	MIL QPL	
		681P 		5.0 μ F \Rightarrow 100 μ F	+20% -10%, \pm 10%	1 000 \Rightarrow 2500 V	—	Energy storage
Power electronics	(-55°C -40°C +85°C (+100°C))	PPA - PPA FR PPA M 	Metalized polypropylene	1.5 μ F \Rightarrow 260 μ F	\pm 5 % \Rightarrow \pm 20 %	260 V _{AC} \Rightarrow 900 V _{AC}	in house	Motor run, fluorecence, compensation
		PP 44 A2 PP 44 R5 		0.1 μ F \Rightarrow 300 μ F	\pm 5 % \Rightarrow \pm 20 %	300 V \Rightarrow 2 400 V 250 V _{AC} \Rightarrow 1 200 V _{AC}	in house	Medium power capacitor, semi-conductor protection, high current filtering, medium frequency tuning, decoupling.
		PP 88 - IGB 99 		47 nF \Rightarrow 7.5 μ F	\pm 5 % \Rightarrow \pm 20 %	800 V \Rightarrow 3 000 V 1.5kV _{GTO} \Rightarrow 5.6kV _{GTO}	in house	IGBT capacitors, protection / turn off thyristors GTO, medium frequency tuning.
		BI 73 A - BI 73 R R 73 A - R 73 R 	Bi-film Polyester + foil	1 nF \Rightarrow 2.2 μ F	\pm 5 % \Rightarrow \pm 20 %	1 000 V \Rightarrow 2 200 V Ucrete \Rightarrow 5 000 V	in house	Filtering, protection
Mica	-55°C +125°C	CA 1 - CA 2 CA 17 to CA 19 	Silvered mica	4.7 pF \Rightarrow 100 nF	\pm 0.5 pF or \pm 1 % \Rightarrow \pm 10 %	500 V \Rightarrow 5 000 V	CECC Acc. MIL C 5	Filtering circuits, delay line circuits, oscillators, pulse circuits, H.F. generators, emission lines, D.C. blocking circuits, coupling, measurement...
		CA 15 - 20 - 30 - 40 CA 152 to 158 		4.7 pF \Rightarrow 15 nF	\pm 1pF or \pm 1 % \Rightarrow \pm 10%	63 V \Rightarrow 500 V		
		CM 04 to CM12 CMR 04 to CMR 07 		200 pF \Rightarrow 1200 pF	\pm 0.5 pF or \pm 1 % \Rightarrow \pm 5 %	100 V \Rightarrow 500 V		

ELECTROLYTIC ALUMINUM CAPACITORS

EXXELIA is the only manufacturer who develops its own electrolytes, enabling to achieve the longest lifetime of the market. EXXELIA aluminum electrolytic capacitors provide high capacitance values (up to 2.2 F), long lifetime and can support extreme temperatures, including the only Snap range operating to $-55^{\circ}\text{C} / +125^{\circ}\text{C}$.

They are particularly suitable for D.C voltage applications in energy storage (lighting flash lamps, welding machines, radiology, radars) and time delay devices.

		Product range	Sizes $\varnothing \times h$ (mm)	Capacitance	Voltage	Main characteristics
Screw terminals	$-55^{\circ}\text{C} / +125^{\circ}\text{C}$	FELSIC 125FRS	36x52 to 90x145	220 μF to 150 000 μF	16 V to 350 V	Low ESR, $+125^{\circ}\text{C}$
	$-55^{\circ}\text{C} / +105^{\circ}\text{C}$	FELSIC 105FRS	36x47 to 77x144	470 μF to 68 000 μF	10 V to 100 V	Very low ESR
		FELSIC HV	51x81 to 90x200	1 000 μF to 47 000 μF	160 V to 450 V	Extreme Long life, High ripple
		FELSIC 105	36x52 to 90x200	100 μF to 470 000 μF	16 V to 450 V	Extreme Long life
	$-55^{\circ}\text{C} / +85^{\circ}\text{C}$	FELSIC 105 LP	90x67	1 500 μF to 220 000 μF	10 V to 450 V	105 with Low Profile can
		FELSIC HC NEW	36x44 to 90x220	100 μF to 2.7 F	10 V to 500 V	High energy density achieve the same capacitance with twice as less capacitors
		FELSIC 85	36x52 to 90x200	68 μF to 680 000 μF	10 V to 630 V	Standard 85°C
		FELSIC 85M	36x52 to 90x200	68 μF to 680 000 μF	10 V to 630 V	Standard $85^{\circ}\text{C} \pm 20\%$ tolerance
		FELSIC 039 FELSIC 037	36x47 to 77x144	100 μF to 150 000 μF	10 V to 400 V	Standard C039 type (railway maintenance standard)
Radial leaded type	$-55^{\circ}\text{C} / +105^{\circ}\text{C}$	CUBISIC	35x35x16. 35x50x16	100 μF to 33 000 μF	10 V to 450 V	Non cylindrical case, Withstand 20 g vibrations, High energy density
	$-55^{\circ}\text{C} / +145^{\circ}\text{C}$	CUBISIC LP	45x35x12 to 45x75x12	220 μF to 68 000 μF	10 V to 400 V	Non cylindrical case, Withstand 20 g vibrations, High energy density
		ALSIC 20g	18x20 to 35.5x25	33 μF to 80 000 μF	10 V to 500 V	Withstand 20 g vibrations
		ALSIC 145 20g	18x20 to 22.5x25	470 μF to 2 200 μF	10 V to 115 V	High temp. range, Long life, withstand 20 g vibrations
Snap in type	$-55^{\circ}\text{C} / +125^{\circ}\text{C}$	Snapsic 125	22x25 to 35x50	470 μF to 47 000 μF	16 V to 100 V	High temperature range, Long Life
	$-55^{\circ}\text{C} / +105^{\circ}\text{C}$	Snapsic HV	22x25 to 35x50	47 μF to 2 200 μF	160 V to 500 V	Long Life, High ripple current
	$-55^{\circ}\text{C} / +85^{\circ}\text{C}$	Snapsic 105	22x25 to 35x50	22 μF to 68 000 μF	16 V to 500 V	Standard 105°C type
	$-55^{\circ}\text{C} / +85^{\circ}\text{C}$	Snapsic HC NEW	22x25 to 35x50	47 μF to 47 000 μF	25 to 450 V	High energy density
	$-55^{\circ}\text{C} / +85^{\circ}\text{C}$	Snapsic	22x25 to 35x50	22 μF to 47 000 μF	16 V to 500 V	Standard 85°C type
	$-55^{\circ}\text{C} / +105^{\circ}\text{C}$	Snapsic 105 4P	35x50 to 45x75	330 μF to 150 000 μF	16 V to 550 V	Standard 105°C type with 4 Pins
	$-55^{\circ}\text{C} / +105^{\circ}\text{C}$	Snapsic 105 LP	45x21 to 45x40	150 to 68 000 μF	16 V to 500 V	Low Profile 105°C with 4 Pins
	$-55^{\circ}\text{C} / +85^{\circ}\text{C}$	Snapsic 4P	35x50 to 45x100	330 to 150 000 μF	16 V to 500 V	Standard 85°C type with 4 Pins
Axial type	$-55^{\circ}\text{C} / +150^{\circ}\text{C}$	Prorelsic 145	14x30 to 25x75	6.8 to 10 000 μF	16 V to 450 V	High temperature Long life
	$-55^{\circ}\text{C} / +150^{\circ}\text{C}$	Vacsic 150	14x30 to 16x30	6.8 to 3 300 μF	16 V to 450 V	High temperature Long life, Withstand 45 g vibrations
	$-55^{\circ}\text{C} / +125^{\circ}\text{C}$	Prorelsic 125	12x25 to 25x75	1 to 15 000 μF	10 V to 350 V	125°C Long life
	$-55^{\circ}\text{C} / +105^{\circ}\text{C}$	Vacsic 105	12x25 to 16x30	15 to 4 700 μF	10 V to 450 V	Standard 105°C type; Withstand 45 g vibrations.
	$-55^{\circ}\text{C} / +85^{\circ}\text{C}$	Sical /Sical C042	6.5x19 to 25x75	6.8 to 47 000 μF	10 V to 630 V	Standard 85°C type

MAGNETIC CATALOG PRODUCTS


EXXELIA designs and manufactures magnetic components including wound magnetics, inductors, transformers, motors, sensors and actuators for high voltage, high temperature and power applications.

EXXELIA offers high-grade and standard technologies for high power or low power applications. Both technologies are available either as catalog product series (already developed) or as technologies for custom products (with engineering support from EXXELIA).

	Product Series	Current	Inductance	Temperature Range	Frequency	Notes
HIGH GRADE PRODUCTS	<div>Chips Inductors</div> <div>MPCI 10000, 12000, 20000</div> 	15 mA to 1 000 mA	0.010 μ H to 1 000 μ H	-55°C to +125°C	7.9 MHz to 500 MHz	QPL, Space Qualified
	<div>MPCI H01</div> 	100 mA to 1 500 mA	0.38 μ H to 100 μ H	-55°C to +125°C	–	QPL, Space Qualified
	<div>MPCI 233</div> 	25 mA to 114 mA	18 μ H to 1 000 μ H	Up to +175°C	–	High Temperature
	<div>MPCI 233 H01</div> 	100 mA to 1 500 mA	0.38 μ H to 100 μ H	Up to +175°C	–	High Temperature
	<div>Wide Band RF</div> <div>WRFT 4x</div> 	–	–	-55°C to +125°C	Bandwidth 100 kHz to 400 MHz	Generic specification ECSS, ESCC, MIL for Space
	<div>C. Mode Choke</div> <div>HCESC</div> 	0.4 A to 2.5 A	15 μ H to 470 μ H	-55°C to +125°C	Up to 100 MHz	Generic specification ECSS, ESCC, MIL for Space
	<div>Data Line Filters</div> <div>DLEF 42</div> 	Up to 100 mA	5 μ H at 15 MHz	-55°C to +100°C	15 MHz to 300 MHz	Generic specification ECSS, ESCC, MIL for Space
	<div>Line-Matching</div> <div>MTLM 1234 MIL</div> 	–	Up to 5.5 μ H	-55°C to +125°C	100 Hz to 10 kHz	Line isolation Impedance matching
	<div>Current Transfo.</div> <div>DBIT / SBIT</div> 	MIL-STD-1553 Data Bus Transformer		-55°C to +125°C	75 kHz to 1 MHz	Aerospace, ESA / EPPL
	<div data-kind="parent" data-rs="7">SMD Power Inductors</div> <div>ESI 01</div> 	0.26 A to 2.1 A	1.72 μ H to 106.45 μ H	-55°C to +125°C	Up to 1 MHz	Generic specification ECSS, ESCC, MIL for Space
	<div>ESI 7</div> 	1.4 A to 6 A	0.42 μ H to 8.42 μ H	-55°C to +125°C	Up to 1 MHz	Generic specification ECSS, ESCC, MIL for Space
	<div>CCM 4, CCM 5, CCM 6 CCM 20, CCM 25</div> 	0.33 A to 17.7 A	1 μ H to 4680 μ H	-55°C to +125°C	Up to 1 MHz	High Reliability Compliant ESA, ECSS, MIL
	<div>SESI 9.1, 14, 15, 18, 22, 32</div> 	0.045 A to 24 A	1 μ H to 6 800 μ H	-55°C to +125°C	Up to 1 MHz	QPL, Space Qualified
	<div>HTSE xx WR/SR</div> 	0,36 A to 16.4 A @ 25°C 0,2 A to 10,2 A @ 155°C	3 to 2041,3 μ H no load 2.7 to 1837.2 μ H @ 155°C	-55°C to +180°C	Up to 1 MHz	High Temperature QPL, Space Qualified
	<div>HTSE 47 SR</div> 	1 A to 20 A @ 25°C 0,6 A to 12 A @ 155°C	1.3 to 5593.2 μ H no load 1.2 to 5033.9 μ H @ 155°C	-55°C to +180°C	Up to 1 MHz	High Temperature QPL, Space Qualified
	<div>DMC 22 xxx 1WR</div> 	4 A	25 μ H @ 25°C	-55°C to +125°C	–	Aeronautic, Space
	<div data-kind="parent" data-rs="2">Common Mode Choke</div> <div>CMC 15, CMC 18, CMC 22</div> 	0.55 A to 14.3 A	60 μ H to 4 900 μ H	-55°C to +125°C	–	Aeronautic, ESA QPL
	<div>CMC 14, CMC 17</div> 	1.1 A to 11.7 A	140 μ H to 69 200 μ H	-55°C to +125°C	–	ESA Generic Specification
	<div data-kind="parent" data-rs="4">Current (sense) Transformers</div> <div>CT 01 100 261 x</div> 	3.5 A	3.9 μ H	-55°C to +125°C	10 kHz to 250 kHz	Aeronautic, Space
	<div>CT 08 200 221 PR</div> 	8 A _{Peak} / 3.6 A max.	–	-40°C to +110°C	100 kHz to 200 kHz	Aeronautic, Space
	<div>CT 91</div> 	10 A pk max. Turn ratio 1:50/1:200	0.4 μ H to 6.4 μ H	-55°C to +125°C	6 kHz to 500 kHz	Aeronautic, Space
	<div>CT 15 200 231 WR</div> 	–	6.4 μ H	-55°C to +125°C	6 kHz to 100 kHz	Aeronautic, Space
	<div data-kind="parent" data-rs="2">Gate drive transformers</div> <div>GDT 15</div> 	ET: 60/80 V μ s Turn ratio 1:1.52/1:1.1	–	-55°C to +125°C	Up to 500 kHz	Aeronautic, Space
	<div>GDT 91</div> 	ET: 50/135 V μ s Turn ratio 1:1/1:1.1	–	-55°C to +125°C	Up to 500 kHz	Aeronautic, Space
STANDARD PRODUCTS	<div>Common Mode Chokes</div> <div>TCM Series</div> 	0.3 A to 4 A	0,7 mH to 47 mH	0.15 m Ω to 1750 m Ω	-55°C to +125°C	Aeronautic, Industry, Defense, Railway
	<div>CMESC Series</div> 	1.1 A to 11.7 A	0.45 mH to 69.2 mH	5 m Ω to 500 m Ω	-40°C to +125°C	Defense, Industry
	<div>Current transfo.</div> <div>CT 05 xxx 231 W</div> 	2.2 A [1.5 A TYP]	1.2 mH to 540 mH	6 m Ω [A-B] 1 m Ω to 9.6 m Ω [1-3]	-40°C to +100°C	Defense, Industry

HIGH GRADE, HIGH POWER TECHNOLOGIES

HIGH GRADE TECHNOLOGIES



Custom Design Technologies
Hybrid Magnetism Transfer-Molded Components



CCM Technology
ESA ESCC 3201011 Technology Flow Certificate for custom designs.
Replace wire leads by regular output pins




SESI Custom Technologies
Custom transformers and inductors in the standard
SESI 9, 15, 18, 22 and 32 packages



Custom Packages with Additional Terminations
Shielded versions of SESI



Toroidal Transfer Custom Magnetism TT and TO Toroidal
Pick and place custom toroidal magnetic components from leaded
toroids to pick and place components



High Temperature Inductors and Transformers
High Temperature products withstanding up to 230°C

HIGH POWER TECHNOLOGIES



Aluminium and Copper Foil
Technologies



High Grade Custom Planar
Magnetism



U Shaped Ferrite assembly



Overmolded U Cores Assembly



Nanocrystalline Toroidal Cores
Assembly



Overmolded Nanocrystalline Toroids



C Cores Assemblies



EI, U, ... Lamination assemblies



Water Cooling



Sensor : Current transformer



Sensor : Voltage transformer



Integrated subassemblies



Winding flat wire on range

STANDARD TECHNOLOGY / BUILT TO PRINT


STANDARD TECHNOLOGIES




Toroidal Magnetic Core Platform
Power conversion
in electronic applications



RM Platform
Power Transformers
and Inductors in SMP power supplies



ETD Platform
Transformers in forward
and push-pull SMPS



EFD Platform
DC-DC converters, isolation
and pulse application



EQ Platform
Power transformers in
SMP power supplies



ER and EP Platform
Design know how
and manufacturing capabilities



Custom Power Magnetics
Powerful magnetics
for a wide range of applications


BUILT-TO-PRINT




Bobbins
For Actuators, Antennas & Sensors



Rotors & Stators
Stators diameter from 10 to 500 mm and weight up to 250 kg
Up to high temperature 220°C products:



High Performances Passive Filters
For ADSL telecom, public telephones, railway
systems, home automation and so on

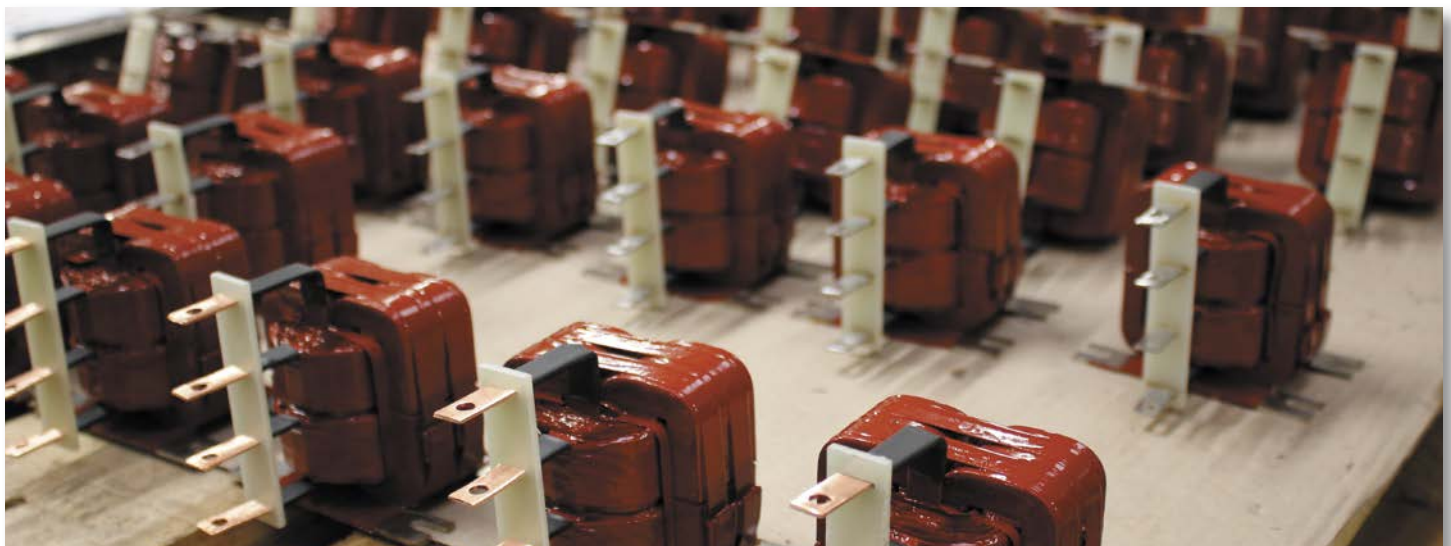

Our Engineers use advanced finite-elements simulation software to model and analyse electromagnetic behavior. **EXXELIA** can provide the experience and the expertise of its technical team to:

- Full design, starting from the functional specifications, **EXXELIA** can explore different kind of topologies, with respect to the request.
- Optimization of an existing design (example: weight reduction, torque increase, losses reduction, etc...)

CAD geometry and circuit import/export (*.step, Catia, Spice, ...)


We can do for you the following analysis:

- Optimization under constraints
- Parametric analysis
- Sensitivity analysis


Some calculations: Torque [N.m], Force [N], Resistance [Ω], Losses[W], L matrix [H], C matrix [F]

Some applications: linear or angular electric motor, electromagnet, linear or angular actuator, proportional valves, position sensor, etc...


Proportional Hydraulic Valve

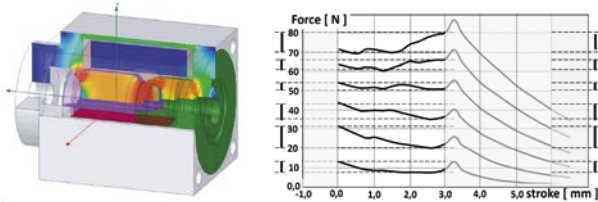

Linear Position Sensor

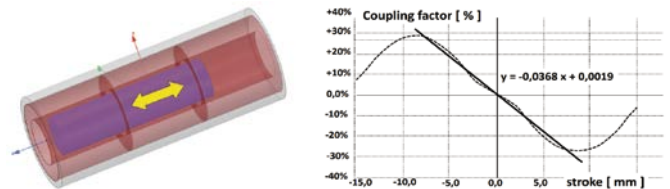

Design and Support for Electrical Motor Design

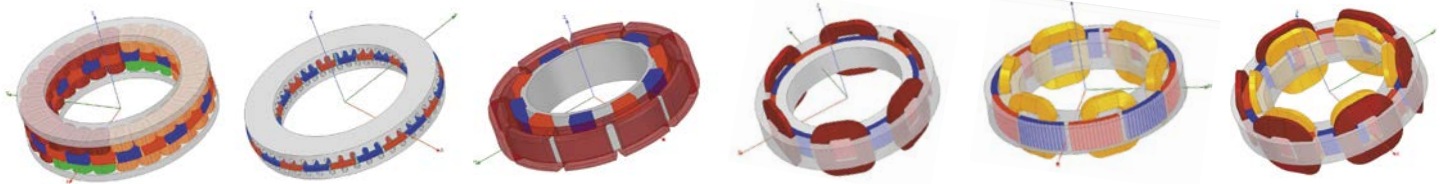

A FEW CUSTOM PRODUCTS




Flyback Transformers FLYT Series
MIL, ECSS Compliant




Push Pull Transformers
FL Serie



400 Hz Current Measurement
Transformer Custom Designs



400 Hz Current Measurement
Transformer Custom Designs




400 Hz Voltage Measurement
Transformer Custom Designs



Magnetic Design Support
for Multi pulses Transformers







Design Support for Parallel
Multicellular Converters Inductors



Design Support for
Integrated Magnetics

THERMAL MANAGEMENT

EXXELIA invests in R&D and makes extensive studies on the thermal management of magnetics, including loss calculations, design rules, thermal resistance and thermal modeling. We have available, a complete database of thermal resistances for all standard magnetics packages and have developed specific software for designing optimized compact components.



POSITION SENSORS & SLIP RINGS


EXXELIA designs and manufactures contact and contactless Position Sensors, Slip Rings and Hybrid Systems.

HIGH PERFORMANCE CONTACTLESS POSITION SENSORS

High accurate Optical Encoders
Accuracy 20 arcsec / resolution 21 bit



Magnetic Encoders
Accuracy 1.5 arcmin / resolution up to 19 bit

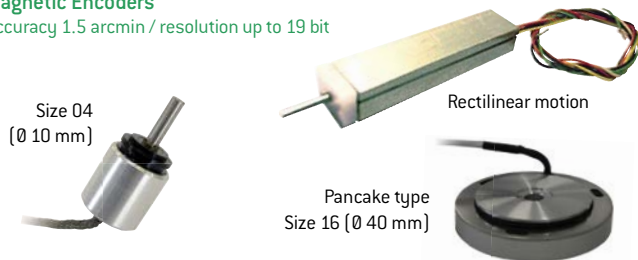

SLIP RINGS

Diameter from 20 mm to 1 200 mm
and more on request




FORJ's

Fiber Optic
Rotary Joints




PRECISION POTENTIOMETERS

Linearity 0.01%

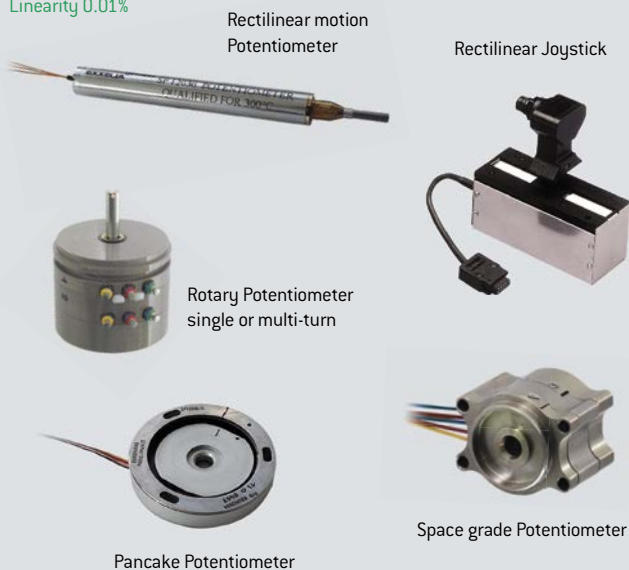


HYBRID SYSTEMS

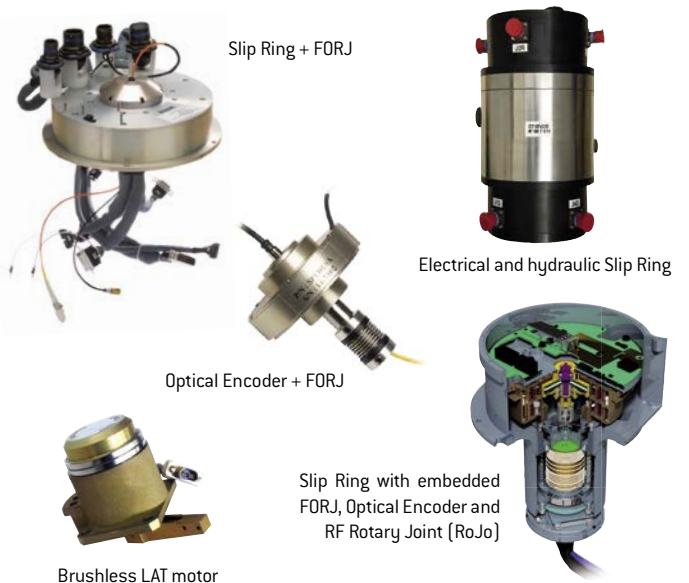

PRECISION MECHANICS

EXXELIA's Precision Mechanics division specializes in machining complex parts, from prototypes to medium series. Our best-in-class palletized-5-axis turning and milling equipment enable us to work with all types of material including titanium, inconel, 35NCD4 etc...

Assembly, high precision manual deburring and hydraulic tests can be carried out in our workshop.

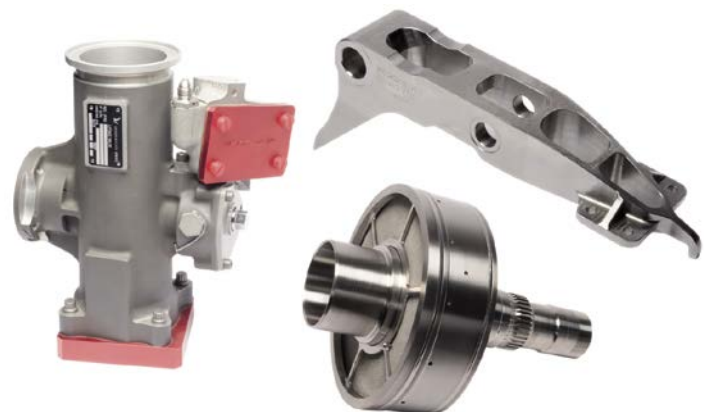


EMI-RFI FILTERS



EXXELIA, is the only manufacturer in the world of ESA QPL EMI-RFI filters in different low pass configurations [C, L, Pi, T, 2 x Pi, 2 x L and 2 x T] intended to protect electronic equipment from interferences for aerospace, telecom and medical markets..

Capacitors are a key components in a filter and thanks to its expertise in the field, EXXELIA is able to manufacture high-end solutions combining performance and reliability.



	T	Model	Current	Voltage	Performance	Qualification	Use
EMI-RFI Filters	-55°C +125°C (up to 175°C)	Feed through Ø 3 - Ø 4 - Ø 6 - Ø 10 (mm)	Up to 15 A	Up to 500 V _{DC} and 115 V _{AC} 400 Hz	Up to 80dB from 10 kHz to 10 GHz	AIR Qualified Compliant MIL 461, D0160	Space, Aeronautic, Defense, Industry.
		Feed through Ø 17 (mm)	Up to 30 A	Up to 3 000 V _{DC} and 200 V _{AC} 400 Hz	Up to 80dB from 10 kHz to 10 GHz	AIR qualified, Compliant MIL 461, D0160	Aeronautic, Defense, Industry.
		Multi ways Filters	Up to 15 A	Up to 500 V _{DC} and 115 V _{AC} 400 Hz	Up to 80dB from 10 kHz to 10 GHz	in house	Aeronautic, Defense, Industry.
		Surface mount FCMS - CFCMS	10 A (20 A for HI version)	Up to 500 V _{DC} and 115 V _{AC} 400 Hz	Up to 70 dB from 10 kHz to 10 GHz	In house	Space, Aeronautic, Defense, Industry.
		SPF...	Up to 500 A	Up to 3 000 V eff.	Up to 10 GHz	in house	Custom design

ENERGY FILTERS

Following 50 years heritage in Defense market, EXXELIA offers highly performant, robust and reliable solutions to protect from different EMC phenomenon all kind of signal such as:

- Power supply,
- Control lines,
- Data communication...

Asymmetric design available for optimized leakage current and size.



	T	Model	Current	Voltage	Performance	Qualification	Use
EMC Filters	-55°C +85°C	Feedthrough Tube filters	Up to 500 A	Up to 1 000 V _{DC} and 400 V _{AC}	Up to 100 dB Up to 18 GHz*	—	Single lines power supply.
		Power cabinets	Up to 2 500 A	Up to 440 V _{AC} (50-800Hz)	Up to 100 dB from 10 kHz to 18 GHz*	TEMPEST: MIL-HDBK-1195 HEMP: MIL-STD-188-125-1 & 2	Three or single phase power supply for TEMPEST and HEMP
		Data communication	Up to 1A	—	Up to 100 dB Up to 18 GHz*	TEMPEST: MIL-HDBK-1195 HEMP: MIL-STD-188-125-1 & 2	Up to 100 MHz bandwidth data signal for TEMPEST and HEMP
		Custom filters	Additional protection for energy and signal filtering.				

* Up to 40 GHz on request.

COMPONENTS & SUB-ASSEMBLIES MANUFACTURING



With two production units located in competitive manufacturing countries, EXXELIA can provide cost-effective sub-assembly capabilities with high technology processes: wire bonding, vacuum metallization, overmolding, harnessing, RF tests, reliability tests.

EXXELIA OHMCRAFT RESISTORS

Precision Resistors for Demanding Applications where Reliability is Essential

EXXELIA Ohmcraft's thick-film, surface mount resistors are engineered to meet application specific needs. Our proprietary EXXELIA Micropen® electronic printing technology is the foundation for EXXELIA Ohmcraft's family of resistor products. Our technology utilizes the proprietary EXXELIA Micropen® electronic printing system to "print" precise, narrow,

serpentine lines with resistive ink on a ceramic substrate producing higher performance resistors over a wider range of values on a smaller surface area than is possible with conventional film resistor technology.

Common attributes for ALL EXXELIA Ohmcraft Resistors: High Stability, Low Noise, Low TCR, Low VCR & Custom Configurations.

	T°	Series	Case Size	Voltage Rating	Resistance Values	Ratio Tolerances	Advantages	Note
Surface Mount Resistors	-55°C +150°C	UHVC Series Ultra High Voltage Chip Resistors	2010 to 5020	Up to 20 kV	Up to 50 GΩ	to 1%	Ultra High Voltage	The highest voltage ratings available in the WORLD
		HVC Series High Voltage Chip Resistors	0402 to 5020	Up to 5 kV	Up to 50 GΩ	to 0.1%	High Voltage	EXXELIA Ohmcraft's flagship high voltage chip series
		HVCD Series High Voltage Chip Dividers	3512 4020 5020	Up to 4 kV	Up to 10 GΩ	to 1%	Surface Mount Divider	Replaces larger leaded divider
		SM Series High Resistance Chip Resistors	0402 to 3512	Up to 600 V	Up to 50 GΩ	to 0.1%	Ultra High Resistance	Excellent for high gain amplifier circuit
		MCH Series Military Grade High Voltage Chip Resistors	0402 to 5020	Up to 5 kV	Up to 50 GΩ	to 0.1%	Military Grade Inspection	Optionally tested to MIL-PRF-55342 MIL-PRF-49462 NASA EEE-INST-002 [Level 1 & 2]
		HC Series Hybrid Chip Series	0202 to 0505	Up to 100 V	Up to 50 GΩ	to 0.1%	Wire Bondable	Excellent for Shock & Vibration Sensors

Precision Leaded Through Hole Resistors

	T°	Series	Case Size	Voltage Rating	Resistance Values	Ratio Tolerances	Advantages	Note
LEADED RESISTORS	-55°C +225°C	HVA Series High Voltage Axial Resistors	05 to 50	Up to 50 kV	Up to 10 GΩ	to 0.1%	Non-Inductive	High precision, thick-film axial through hole resistors
	-55°C +150°C	HVR Series High Voltage Radial Leaded Resistors	21 to 56	Up to 40 kV	Up to 4 TΩ	to 0.1%	High Voltage	High precision, thick-film radial through hole resistors
		HVD Series High Voltage Radial Leaded Dividers	04 to 50	Up to 50 kV	Up to 2 TΩ	to 0.1%	Excellent TCR Tracking	High precision, thick-film radial through hole resistor dividers
		CN Series Custom Leaded Resistor Networks	Custom	Up to 100 kV	Up to 2 GΩ	to 0.1%	Customized Solution	Wide range of customization options available

Custom Solutions

Every day, we receive a phone call or email that starts out with, "We have an idea..." Many of the world's most respected and innovative companies, research institutions and government agencies have chosen EXXELIA Ohmcraft as a

trusted collaborator, working with us to explore new possibilities for custom solutions.

EXAMPLES

Low Energy Neutral Atom Imager (LENA)

539 MΩ to 11.138 GΩ ±1%
Missiles & Space use



Custom Size for Handheld Application

50 kV Low V_{CR}
76,2 mm x 2,032 mm [3" x 0.080"]



1G Seven Decade Divider

20 GΩ to 20 kΩ
Ratio Tol.: 0.25%
TCR Tracking: 25 PPM/°C



EXXELIA MICROPEN® TECHNOLOGY

EXXELIA Micropen®'s proprietary printing technology enables product designers to bring forth their groundbreaking ideas or explore new possibilities that they once thought out of reach. Designers can DREAM BIGGER and DESIGN BETTER.

Our EXXELIA Micropen® printing process has pioneered additive printing from its early days. We take a substrate, any substrate, and print electronically

conductive patterns, transforming the substrate into a critically important component that can sense, heat, detect, ablate or cauterize.

Our technology is the key to making materials more functional, more reliable and more customized.

In today's 3D printing world, our technology turns static into smart by printing on virtually any 3D ceramic, metal or polymeric substrate.

MEDICAL DEVICE

Today's medical device market requires precision durable technology able to withstand a rugged environment without affecting performance. EXXELIA Micropen® printing is the most precise and cost effective way of printing fine line, conformal traces of functional materials directly onto medical devices and 3D geometries.



Endotracheal Tubes



Electrosurgical Devices



Radiopaque Markers



Ablation & Catheter Balloons

TEST & MEASUREMENT

EXXELIA Micropen® Technologies has material science and design engineering expertise along with a proven track record resulting in high-precision, robust, smaller, and smarter instrumentation devices.

EXXELIA Micropen®'s printing technology enables precision and repeatability required by modern measurement and detection equipment. A component designed from scratch, new versions with increased functionality, or becoming a second source provides a level of service and performance unmatched in the instrumentation market. Products features may include: Unmatched Design Flexibility, Superior Linearity and Stability, Robustness and Ruggedness, High Ohmic Values, Low Noise, Shrink product footprint, TCR tuning, Built-in feedback.



Laboratory Equipment



Thick Film Heater



Temperature Sensor



Precision Gauge

SECURITY & DETECTION

We recognize innovation as an essential element of successful military and space programs. EXXELIA Ohmcraft has served markets in electronic warfare, weapons platforms, force protection, intelligence and space programs for over two decades, reliably supporting a wide range of products, programs, and applications. Our custom resistors are designed to support the rigorous specifications required by military and space suppliers who depend on the precision and reliability of our products. EXXELIA Ohmcraft is able to screen and qualify our resistors to the following specifications: MIL-PRF-55342, MIL-PRF-49462, NASA EEE-INST-002 [Level 1 & 2].

Trace Detection
Drift Tube



Mass
Spectrometry

	Substrate	Common Tradenames*	Material applied by EXXELIA Micropen	Function Added	Applications Demonstrated
Polymers	Polyethylene Terephthalate (PET)	Mylar®, Melinex®	Ag, W	Conductivity, Radiopacity	Cardiac ablation balloon, lead on cardiac ablation wire guide
	Polyurethane	Texin®, Desmopan®, Tecothane®, Estane®, Pellethane®	Ag, TiO2	Conductivity, Opacity	Capsule antenna, electrode on sheath, visualization
	Silicone	SilMedic®, BioSil®, Silikophen®, Nusil™	Ag, W	Conductivity, Radiopacity	Atrial ablation balloon, flexible brain stimulation electrode
	Silicone-Urethane Copolymer	Elast-Eon™	Ag, W	Conductivity, Radiopacity	Visualization
	Polyamide (Nylon)	Vestamid®, Grilamid®	Ag, W	Conductivity, Radiopacity	Sensing on balloon catheter
	Polyetheramide	PEBAX®	Ag, W	Conductivity, Radiopacity	Catheter stimulation and sensing, ablation catheter
	Polyetherimide	Utem®	Ag	Conductivity	Stimulation
	Polyetherether Ketone	Vestakeep®, PEEK-Optima®	Ag, W	Conductivity, Radiopacity	Heater
	Polysulfone	Radel®, Udel®, Fortron®	Ag	Conductivity	Sensing
	Polytetrafluoroethylene (Etched)	Teflon®	Ag, W	Conductivity, Radiopacity	Visualization
	Polycarbonate	Makrolon®, Calibre™, Lexan®	Ag, W	Radiopacity, Conductivity	Sensing on surgical device
	Polyvinylidene Fluoride	Dyflor®, Kynar®	W	Radiopacity	Visualization
	Polyvinyl Chloride	Nakan®, Chlorite™	Ag	Conductivity	Sensing on endotracheal tube
	Polyhydroxyalkanoate	Biopol™, Mirel™	W	Radiopacity	Visualization
	Liquid Crystal Polymer	Vectra®	Ag	Conductivity	Heater, thermistor
	Poly(P-Xylylene)	Parylene™	Ag	Conductivity	Balloon electroporation
	Styrene-Butadiene	Styrolux®	Ag	Conductivity	Optthalmic electroporation
Metals	Stainless Steel	316SS, 304SS, 420SS	Various polymers, Ag	Dielectrics, Conductors	Heaters
	Titanium	—	Au	Conductor	Sensing
	Silicon	—	Various polymers, Ag	Dielectrics, Conductors	Sensing
Cera- mic	Alumina	—	Ag, Au, Pd, Pt	Conductor, Capacitor,	Electrocaterization, heaters, sensors
	Silica	Pyrex®, Glass, Quartz	Ag, Various polymers	Conductors, Protective layers	Heaters

*All registered trademarks and tradenames are the property of their respective owners.

**Headquarters**

93, rue Oberkampf
75011 PARIS • FRANCE
Tel.: +33 1 49 23 10 00
info@exxelia.com
www.exxelia.com

AMERICAS**North America**

1221 N. Highway 17-92,
Longwood, FL 32750 • USA
Tel.: +1 407 695-6562
sales.usa@exxelia.com

EUROPE**Western Europe**

93, rue Oberkampf
F-75540 PARIS CEDEX 11 • FRANCE
Tel.: +33 1 49 23 10 00
sales.eu@exxelia.com

Northern Europe

Cylindervägen 18
SE-131 52 Nacka Strand • SWEDEN
Tel.: +46 76 16 50 014
sales.nordic@exxelia.com

APAC**India**

Level 7, Mfar Greenheart
Manyata Tech Park
Outer Ring Road, Hebbal,
BANGALORE - 560045
Tel.: +91 80 67 65 41 14
sales.india@exxelia.com

China

Mayfair Tower NO.83
Fu Min Road - 200040 Shanghai • CHINA
Tel.: +86 21 6132 7197
sales.china@exxelia.com