


“MINILAT” TORXNADO DATA SHEET

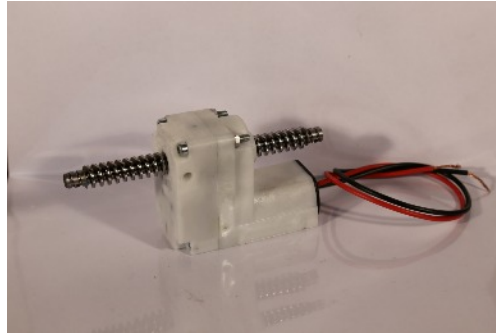

VERSION	VOLTAGE (D.C.)	NO LOAD SPEED (mm/sec)	NOMINAL LOAD (KG)	NO LOAD CURRENT (A)	NOMINAL CURRENT (A)	MAX.LOAD (KG)
MiniLAT 0.3A 1/12	12	14	0,5	0,1	0,2	1
	24	28	1	0,1	0,4	2
MiniLAT 0.3A 1/27	12	7	1	0,1	0,2	2
	24	14	2	0,1	0,4	4
MiniLAT 0.3A 1/60	12	3	2	0,1	0,2	4
	24	6	4	0,1	0,4	8

MiniLAT 0.6A 1/12	12	20	0,7	0,2	0,4	1,5
	24	40	1,4	0,2	0,8	3
MiniLAT 0.6A 1/27	12	10	1,5	0,2	0,4	3
	24	20	3	0,2	0,8	6
MiniLAT 0.6A 1/60	12	5	3	0,2	0,4	6
	24	10	6	0,2	0,8	12

MiniLAT 1.5A 1/12	12	30	3	0,3	0,8	5
MiniLAT 1.5A 1/27	12	15	5	0,3	0,8	10
MiniLAT 1.5A 1/60	12	7	10	0,3	0,8	20

General notes:

- general tolerances +/- 20 %
- some versions available only at 12 Vdc (see table)
- working temperature: -20 °C / + 80 °C
- encoder (hall sensor) and thermal protection upon request

To order contact

ALLIED INTERNATIONAL CORP

7 HILL STREET

BEDFORD HILLS , NY 10507

PHONE 914 241 6900 FAX 914 241 6985 EMAIL sales@alliedinter.com